

HYPERION-S


High-power Nonlinear Pulse Compressor

The HYPERION-S series is a pulse compressor using nonlinear technology to compress input laser pulses through spectral broadening. It features advanced cavity design and high-quality femtosecond optics for minimal transmission loss. The built-in monitoring system ensures stable pulse output by checking the spot quality in real time.

This pulse compressor offers excellent interference resistance, long lifespan, and can provide 5-10 times pulse compression, making it ideal for high-power, high-repetition-rate Yb femtosecond lasers.

Product Features:

- Excellent pulse compression: Pulse width under 50fs for ultrafast laser applications.
- High system compatibility: Supports integration with HCF systems.
- Superior stability: 24/7 operation with <0.24% RMS power fluctuation.
- Efficient energy transfer: Over 80% compression efficiency.
- Easy operation and installation: Simple setup, adaptable to various environments.
- Wide applications: Ideal for micro/nano processing, precision manufacturing, and more.

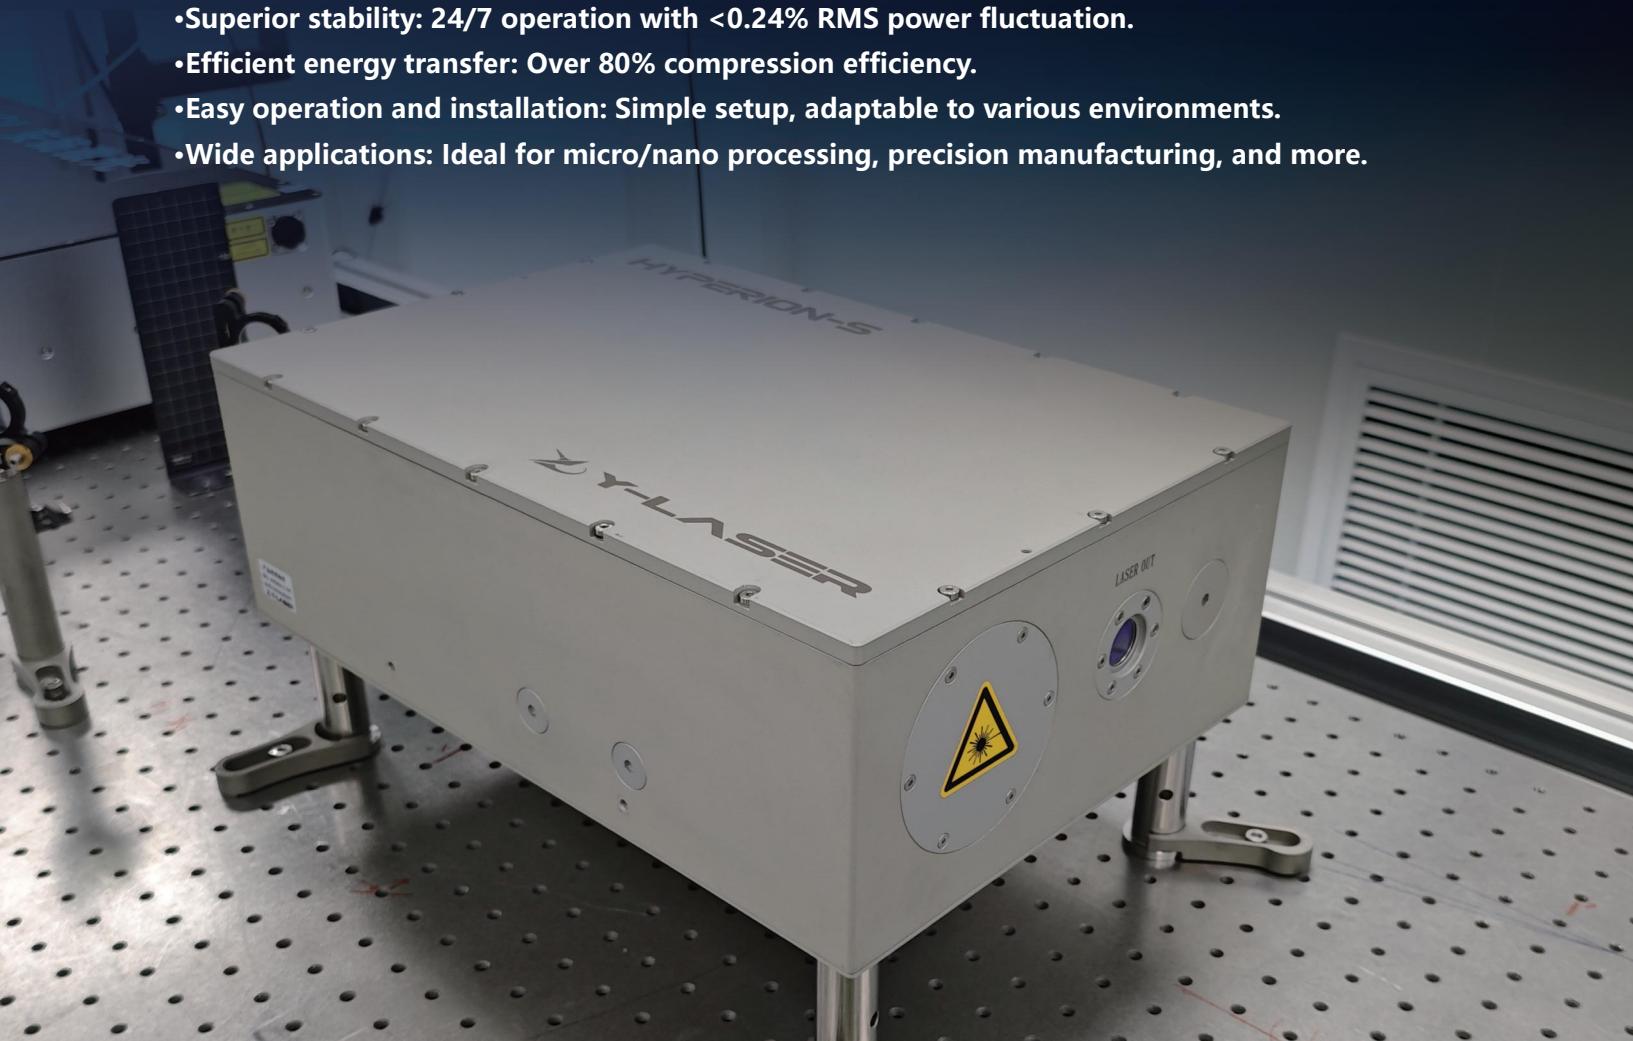

High-Power Nonlinear Pulse Compressor

Application Areas

- Surface Micro-Nano Structures
- Synchrotron Locking and Synchronization
- Laser-Induced Photopolymerization
- Precision Part Cutting
- Polymer/Metal Polishing
- Milling of Complex 3D Structures
- Periodic Surface Structures
- Surface Nano-Structuring




Parameter Specifications

| Parameter | HYPERION-S |
|--|--|
| Incident pulse width | 150fs - 1ps |
| Incident pulse energy | 5 - 20μJ |
| Incident laser central wavelength | 1030 ± 10nm |
| Maximum compatible power | 80W |
| Typical compression ratio | 5 - 10 |
| Compressor efficiency | >80% |
| Typical output pulse width | <50fs |
| Compatibility | Can be cascaded with HCF system to output few-cycle pulses |
| Dimensions (L×W×H) | 425.5 x 268 x 146 mm |
| Weight (kg) | 18.3kg |
| Remaining weight (kg) | 24kg (Water-cooled machine) |
| Power supply requirements | AC 220V/10A |
| Power supply requirements for the water-cooled machine | 220V/0.6-5.6A/10.2kW (CWUP - 10AI) |


Note:

Customization is available based on customer requirements for wavelength, pulse width, and other parameters. If you need more detailed information or have any questions about this

MPC pulse compressor, please feel free to contact our technical support team.

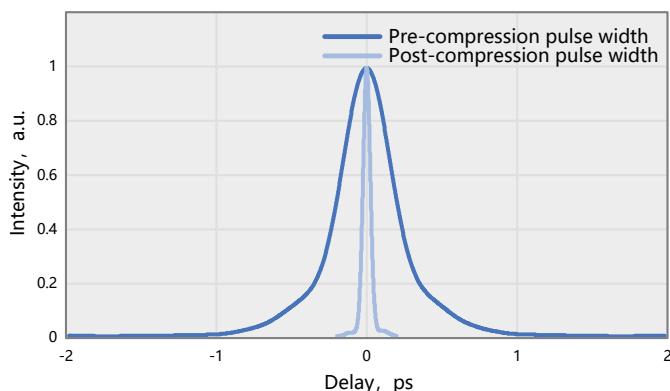


Typical pulse duration of HYPERION-S (42.4fs)

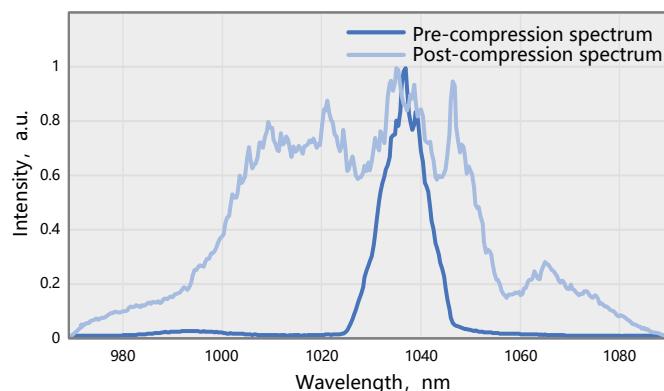


Typical spectrum of HYPERION-S
Incident laser: 20.9μJ/500kHz/130fs

HYPERION-S High-Power MPC


High-Power Nonlinear Pulse Compressor

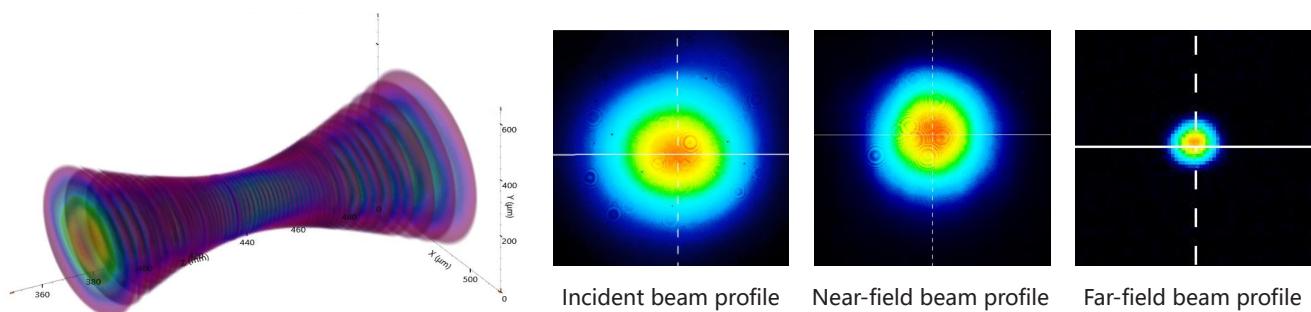


HYPERION-S output M2x: 1.222, M2y: 1.195

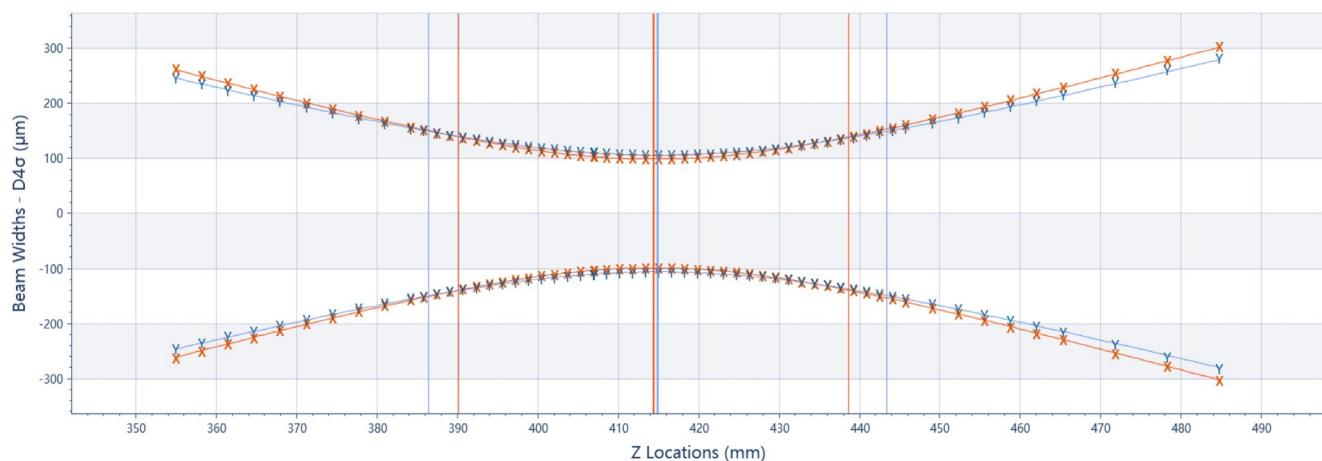

Stability Measurement

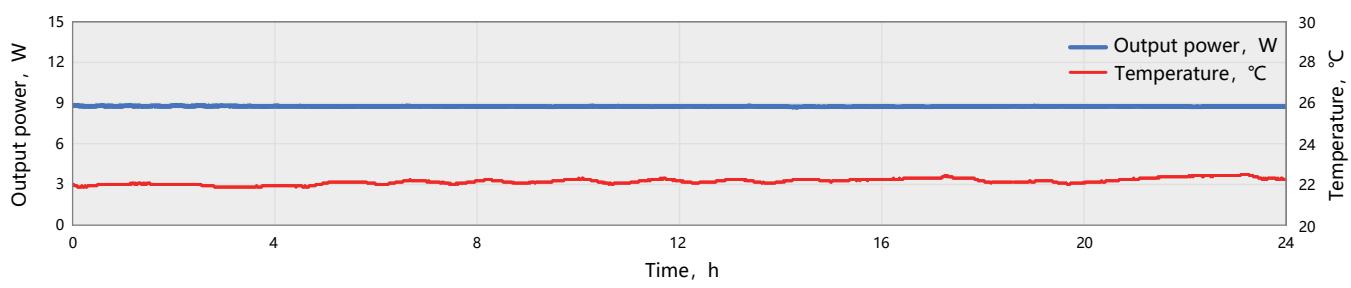





24-hour power stability of HYPERION-S
RMS=0.24%

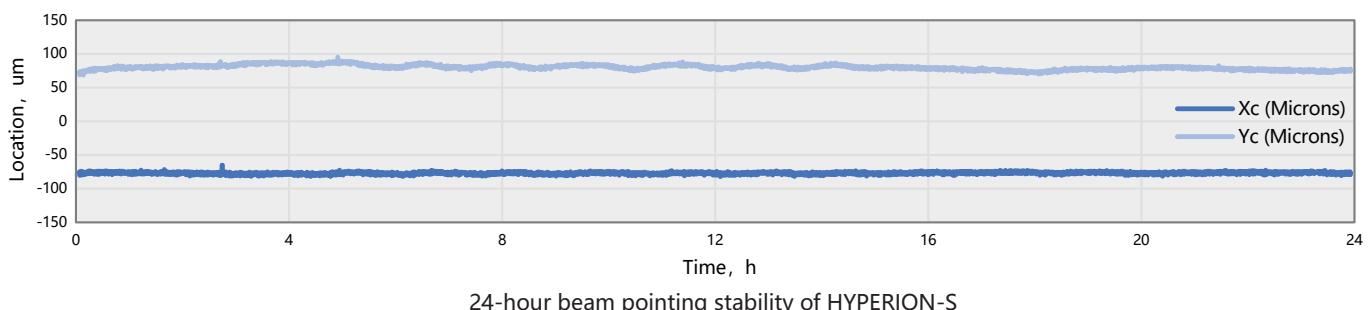

24-hour beam pointing stability of HYPERION-S

High-Power Nonlinear Pulse Compressor

Drawings

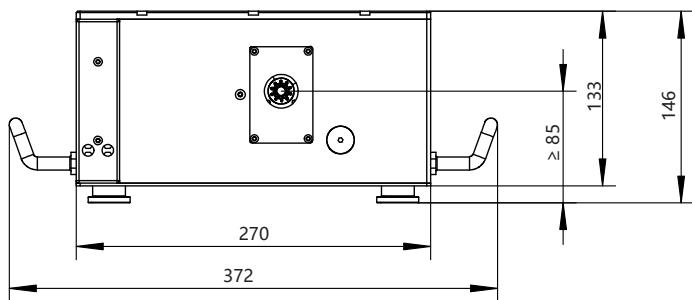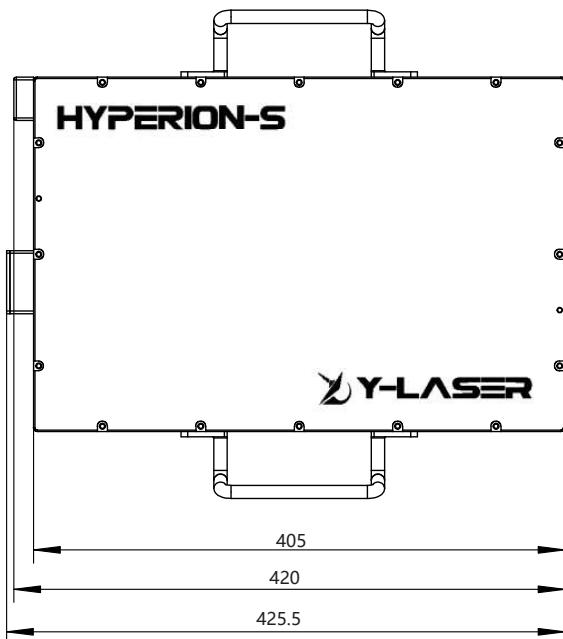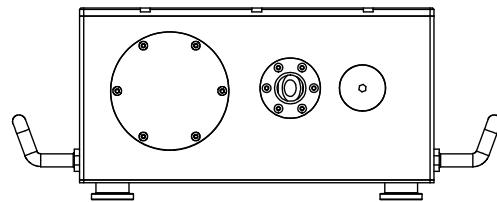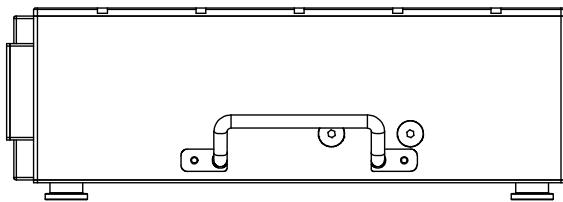

Note:

1. The beam height for both the input and output optical paths is $\geq 85\text{mm}$, and can be adjusted to match the laser's beam height

HYPERION-S outline drawing